



Features


- * Simply operating.
- * Large flow rate.
- * Suitable for vacuum operation.
- * Available for panel mounting.

Symbol

- TSV8753-02M
- TSV8753-02SX
- TSV9832-02M



- TSV8753-02S
- TSV8753-02MX



TSV9832-02M

TSV8753-02S

TSV8753-02M


How to order

TSV8753 -		02	N	M	F
Rotary valves		Port size	Thread	Acting	Mounting bracket
53	5/3 way	02 1/4"	Blank PS	S Spring return (For 1/4" port only)	Blank W/O bracket
		03 3/8"	N NPT	M Detent	
				SX Exhaust center, Spring return (For 1/4" port only)	
				MX Exhaust center, Detent	


TSV9832 -		02	N	M
Rotary valves		Port size	Thread	Acting
32	3/2 way	02 1/4"	Blank PS	M Detent
			N NPT	S Spring return

Flow chart

Model: TSV8753-02,03M(S)

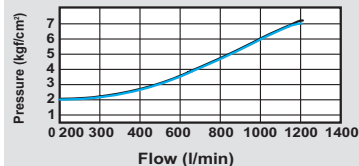

Model: TSV9832-02M(S)

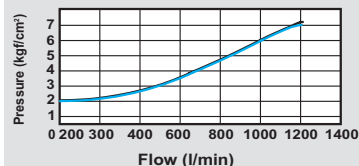


Specifications


Model	TSV8753-02M(S)	TSV8753-03M	TSV9832-02M(S)
Port size	1 / 4"	3 / 8"	1 / 4"
Body material	Aluminum alloy		
Fluid	Compressed air		
Sectional area	18mm ²	35mm ²	18mm ²
Operating pressure range	0 ~ 9 kgf/cm ²		
Max. operating pressure	10 kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		

Dimensions

TSV8753-02, 03

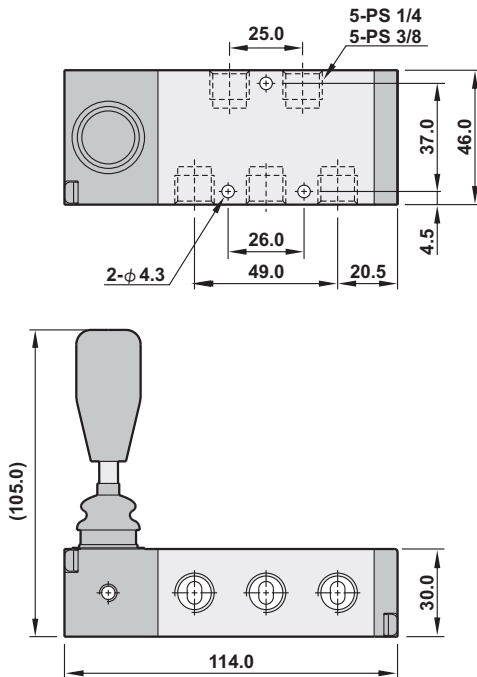


TSV9832-02

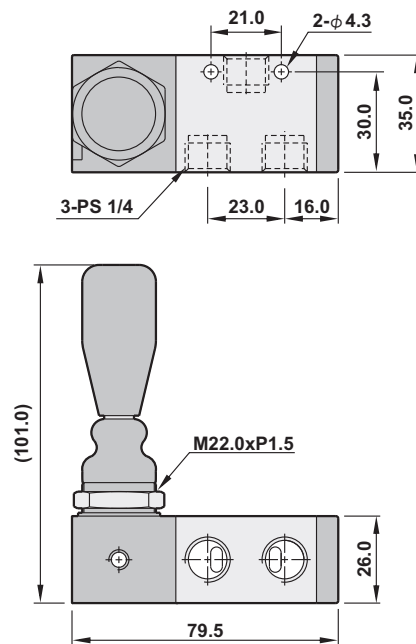

Explosion

Detent

Spring return

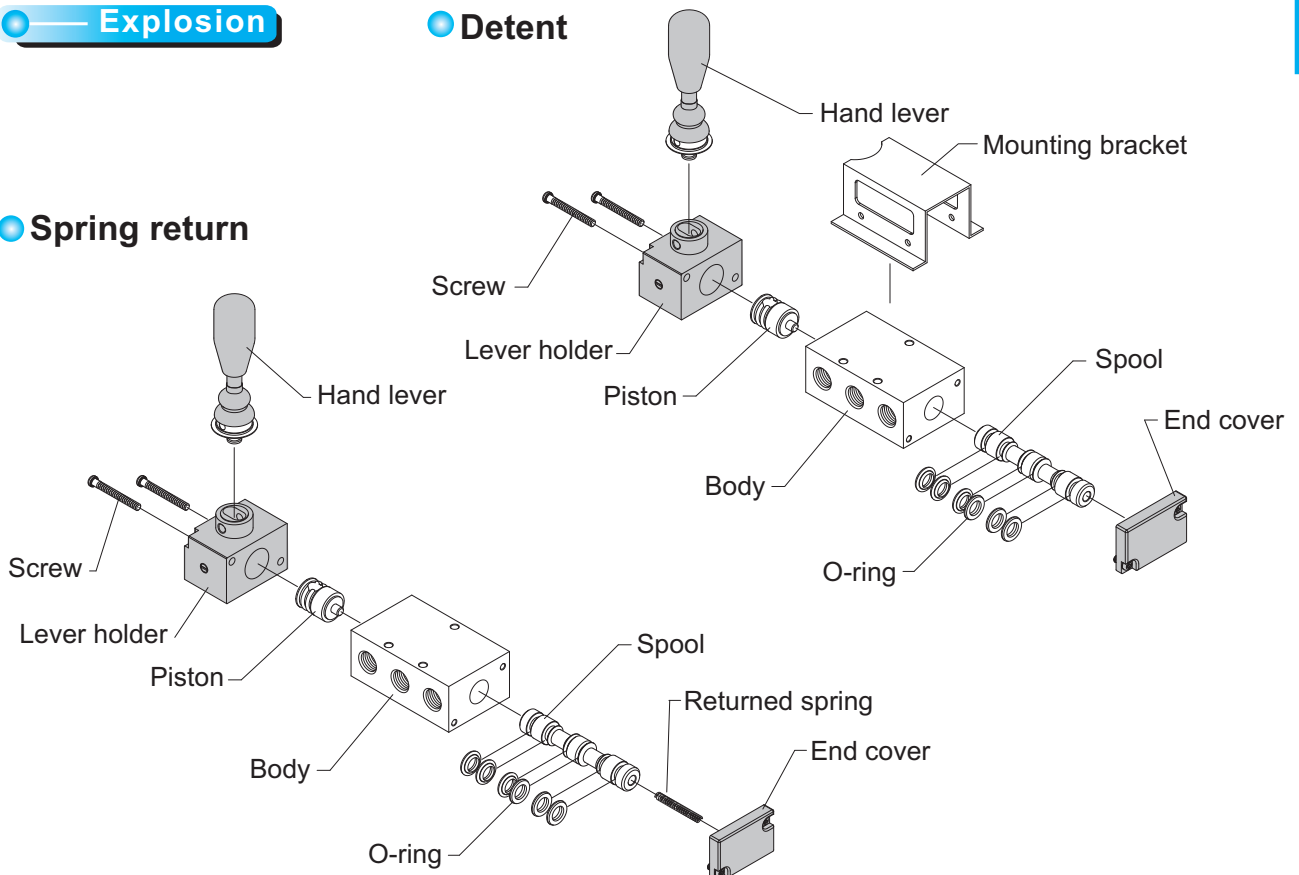


Features


- * Simply operating.
- * Suitable for vacuum operation.
- * Available for panel mounting.
- * Mounting bracket as optional accessory.
- * TSV8652R-01/02 for manifold assembly.

Symbol

• TSV8652 M



• TSV8652 S



TSV8652R-02M

TSV8652-03M

TSV8652-02M

How to order

TSV8652

R

02

N

M

F


Hand control valves		Manifold		Port size		Thread		Acting		Mounting bracket	
52	5/2 way	Blank	Standard	01	1/8"	Blank	PS	S	Spring return	Blank	W/O bracket
		R	Manifold type	02	1/4"	N	NPT	M	Detent	F	W/I mounting bracket For 1/8", 1/4" only.
				03	3/8"						

Specifications


Model	TSV8652(R)-01M(S)	TSV8652(R)-02M(S)	TSV8652-03M(S)
Port size	1 / 8"	1 / 4"	3 / 8"
Body material	Aluminum alloy		
Fluid	Compressed air		
Sectional area	18mm ²	18mm ²	35mm ²
Operating pressure range	0 ~ 9 kgf/cm ²		
Max. operating pressure	10 kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		
R type	For 1/8", 1/4" port only		

Flow chart

Model: TSV8652-01, 02M(S)


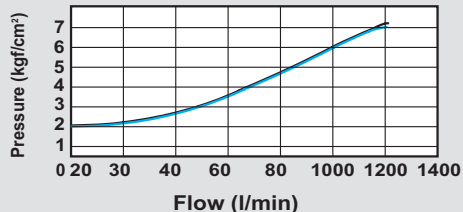


Model: TSV8652-03M(S)


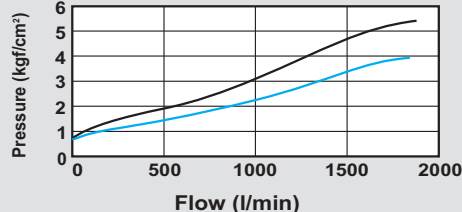


Dimensions



TSV8652-01, 02M(S)

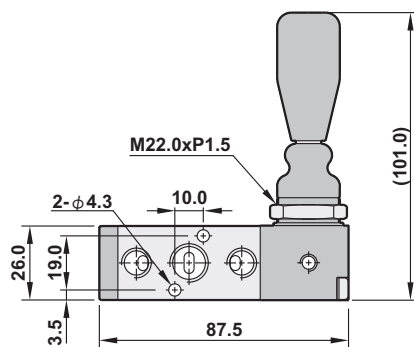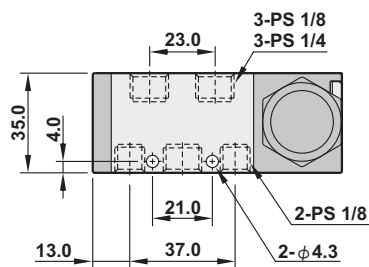

TSV8652-03M(S)

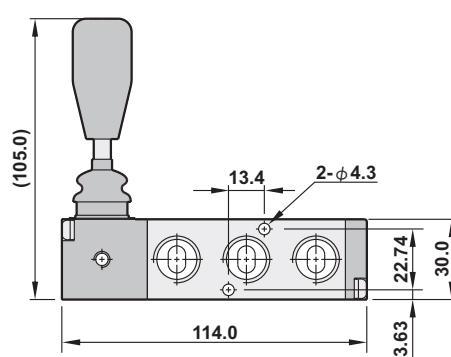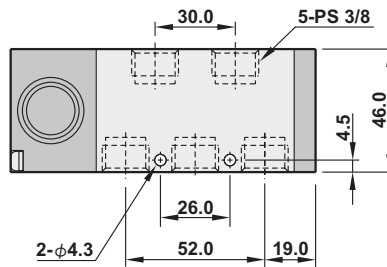

TSV8652R-01, 02

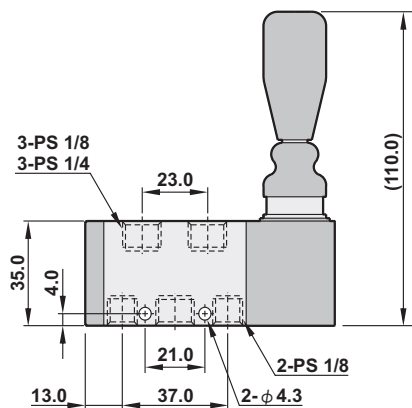

TSV8652-01, 02MF

